

GE Infrastructure Sensing

Applications

The TransPort PT878GC clamp-on gas flowmeter is a complete ultrasonic flow metering system for measurement of most gases, including:

- Natural gas
- Compressed air
- Fuel gases
- Erosive gases
- Corrosive gases
- Toxic gases
- High-purity gases
- Air separation gases

Features

- Clamp-on unobstructed installation
- No wetted parts
- No moving parts
- No pressure drop
- Sound speed output
- Simple installation
- Standard volumetric calculation
- Suitable for a wide range of temperatures and pressures
- Small, lightweight and easy to use
- Large, backlit LCD display
- Alphanumeric and graphic formats
- Rechargeable battery pack
- Logs over 100,000 flow data points
- Submersible package
- 32 site locations
- Optional thickness gauge

GE Panametrics has joined other GE high-technology sensing businesses under a new name —

GE Infrastructure Sensing



TransPort® PT878GC Portable Ultrasonic Gas Flowmeter

Portable Flow Metering at Its Best

The GE Panametrics TransPort PT878GC flowmeter is a highly versatile, self-contained, portable transit-time system with options and accessories to meet a variety of gas flow measurement needs. Its compact size; lightweight, rechargeable battery pack; and universal power supply charger make it the ideal go-anywhere flowmeter.

Historically, clamp-on flow metering was limited to liquids because existing methods could not work on metal pipes containing gases. Several years ago GE Infrastructure Sensing developed new technology that extends all the benefits of clamp-on flow metering to gas measurement. This remarkable ultrasonic technology works with gases at high or low pressure in pipes made of metal and most other materials.

The TransPort PT878GC flowmeter can be used to measure the flow of any gas. It is especially useful for metering erosive, corrosive, toxic, high-purity or sterile gases, or in any application where penetrating the pipe wall is undesirable. Since no tapping or cutting of the pipe is required, permanent

installation costs are significantly reduced. The meter has no wetted or moving parts, causes no pressure drop and has very wide rangeability.

The new meter was tested extensively on metal pipes with diameters as small as 4 inches and pipes as large as 24 inches. Suitable applications for this meter include flow measurements of air, hydrogen, natural gas and many others gases. Using patented Correlation Transit-Time™ detection techniques, demonstrated accuracy is excellent at better than ± 2 percent of reading with ± 0.5 percent repeatability.



The PT878GC portable system in carrying case

imagination at work 

No Pressure Drop, Low Maintenance

Because the transducers clamp onto the outside of the pipe, they do not obstruct the flow inside the pipe. This prevents the pressure drops typically caused by other types of flowmeters. The PT868GC has no components that will foul or collect debris, and there are no moving parts to wear out. As a result, it requires no lubrication and little or no routine maintenance.

Advanced Clamp-On Ultrasonic Transducers

One of the biggest challenges in developing clamp-on ultrasonic transducers for gas applications is the difficulty in transmitting a coded ultrasonic signal through a metal pipe wall, through the gas, and then back through the pipe wall to the second transducer that is waiting to receive the signal. In gas systems, only 4.9×10^{-7} percent of the transmitted sound energy is actually received by traditional ultrasonic transducers. This simply isn't enough to produce reliable measurements.



GE Panametrics technologically advanced clamp-on gas ultrasonic transducers

The new line of clamp-on gas transducers produces signals that are five to ten times more powerful than that of traditional ultrasonic transducers. The new transducers produce clean, coded signals with very minimal background noise. The result is that the PT868GC flowmeter system performs well even with low-density gas applications.

Quick and Easy to Use

It's possible to make the first flow measurement within minutes of opening the box — the TransPort flowmeter is that easy to use. Simply input the site parameters, clamp the transducers onto the pipe, and adjust the spacing. No ancillary equipment is

needed, and there's no need to break into the pipeline. An experienced user can make scores of different measurements in a single day. The TransPort flowmeter is ideal for all kinds of flow survey work.

Built to Be Economical and Stay Economical


To be of real value, a portable flowmeter must be as economical to own and operate as it is capable in the field. The TransPort flowmeter is built to stay in service for many years. Completely solid state, the device rarely wears out or needs servicing, resulting in little downtime and low maintenance costs.



Optional pipe wall thickness gauge

Optional Pipe Wall Thickness-Gauge Transducer

Pipe wall thickness is a critical parameter used by the TransPort flowmeter for clamp-on flow measurements. The thickness-gauge option allows accurate wall thickness measurement from outside the pipe.

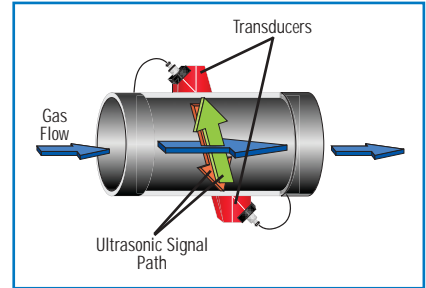

Transit-time flow measurement technique


The PT868GC Flowmeter Uses the Transit-Time Flow Measurement Technique

The transit-time technique uses a pair of transducers, with each transducer sending and receiving coded ultrasonic signals through the fluid. When the fluid is flowing, signal transit time in the downstream direction is shorter than in the upstream direction; the difference between these transit times is proportional to the flow of velocity. The PT878GC measures this time difference and uses programmed pipe parameters to determine flow rate and direction.

Alphanumeric and Graphic Liquid Crystal Display Completes the Picture

A large, multifunction LCD presents measured data in both alphanumeric and graphic forms. In addition, it helps make programming easy by presenting a software menu that walks you through data entry and function selection.

Standard alphanumeric functions include flow velocity, volumetric or mass flow, and totalized flow in either English (U.S.) or metric units.

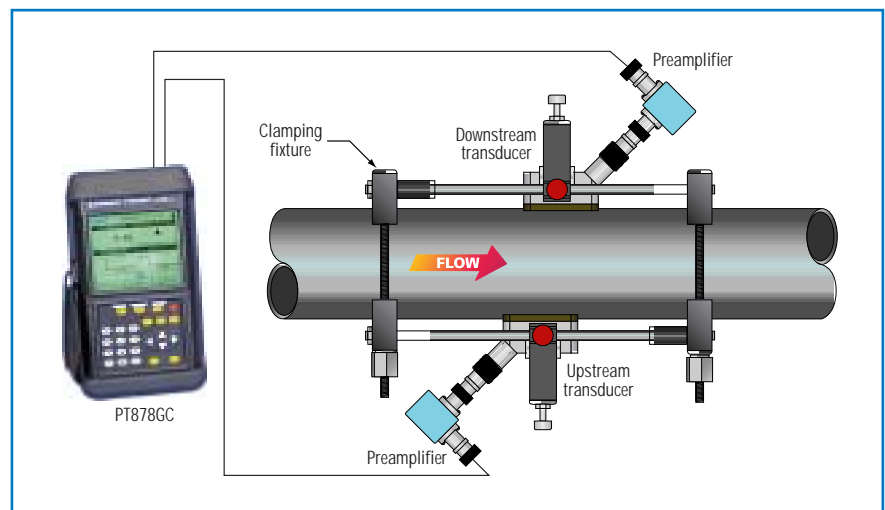

Typical meter setup for portable clamp-on gas flow

PT878GC Accessories

- 1 PT878GC
- 2 AC charger
- 3 Clamp-on gas transducers
- 4 LEMO® BNC transducer interconnection cable
- 5 Input/output cable
- 6 IR-to-serial port adapter
- 7 Thickness gauge
- 8 IR thermal printer
- 9 Printer AC power supply
- 10 CFG-V1 clamping fixture end blocks
- 11 CFG-V4/V8/V12 clamping fixture end blocks
- 12 CFG-PI fixture with chain and alignment block
- 13 Preamplifiers
- 14 Alignment wrap
- 15 Couplant



In graphic mode, the LCD shows both real-time and logged data. The result is a chart recording right on the display, which is very useful for reviewing data and observing trends while on the site.

Submersible, Rugged Electronics Housing

This flowmeter is protected from the day-to-day rigors of industrial usage. The PT878GC is equipped with a rubber boot that provides protection against vibration and shock. The completely sealed housing and ports meet IP67 requirements, so it will withstand submersion in up to 3 ft (1 m) of water for limited periods of time. It will continue to function safely even if it is dropped in water.

Wide Range of Clamping Fixtures Available

Transducer alignment is crucial in obtaining accurate measurements in clamp-on gas installations. GE Infrastructure Sensing offers a wide range of clamping fixtures to help ensure proper alignment of transducers with minimal effort.

Specifications

Operation and Performance

Fluid Types

Acoustically conductive gases with minimum pressure requirements. See Installation Requirements table.

Pipe Sizes

4 to 24 in. (100 to 610 mm) and larger

Pipe Wall Thickness

Thicker walled pipes require greater gas density. See Installation Requirements table on page 4.

Pipe Materials

All metals and plastics. No lined pipes.

Flow Accuracy (Velocity)

- For pipes 6 in. (150 mm) and smaller: ±2% to 5% of reading typical
- For pipes over 6 in. (150 mm): ±1% to 2% of reading typical

Note: Accuracy depends on pipe size and other factors.

Repeatability

±0.2% to 0.5% of reading

Range (Bidirectional)

See Installation Requirements table on page four.

Rangeability (Overall)

150:1

Note: Specifications assume a fully developed flow profile (typically 20 diameters upstream and 10 diameters downstream of straight pipe run) and flow velocity greater than 5 ft/s (1.5 m/s).

Measurement Parameters

Standard and actual volumetric flow, flow velocity and mass flow

Electronics

Flow Measurement

Patented Correlation Transit-Time mode

Enclosure

Submersible IP67

Dimensions

Weight 3 lb (1.36 kg), size (h × w × d) 9.4 × 5.5 × 1.5 in. (238 × 138 × 38 mm)

Display

240- × 200-pixel backlit LCD graphic display

Keypad

25-key rubberized tactile membrane keypad

Internal Battery

Rechargeable battery: 8 hr of continuous operation

Battery Charger Input

100 to 250 VAC, 50/60 Hz, 0.38 A

Memory

FLASH memory, field-upgradable

Operating Temperature

-20° to 55°C (-4° to 131°F)

Storage Temperature

-40° to 70°C (-40° to 158°F)

Note: To ensure maximum battery life, storage temperature exceeding 35°C (95°F) is not recommended for more than one month.

Standard Inputs/Outputs

- One 0/4- to 20-mA current output
- One user-selectable pulse (solid state, 5-V maximum) or frequency (5-V square wave, 100 to 10,000 Hz)
- Two 4- to 20-mA analog inputs with switchable power supply for loop-powered temperature or pressure transmitters

Digital Interface

Infrared communication port for printer or PC interface

Site-Parameter Programming

- Menu-driven operator interface using keypad and “soft” function keys
- Online help functions including pipe tables
- Storage for saving site parameters

Data Logging

- Memory capacity to log over 100,000 flow data points
- Keypad programmable for log units, update times, and start and stop time

Display Functions

- Graphic display shows flow in numerical or graphic format
- Displays logged data
- Extensive diagnostic parameters

European Compliance

Battery-powered system complies with EMC Directive 89/336/EEC

Clamp-On Ultrasonic Flow Transducers

Temperature Ranges

- Standard: -40° to 130°C (-40° to 266°F)
- Optional (overall range): -40° to 230°C (-40° to 446°F)

Transducer Materials

Stainless steel and plastic

Mountings

Portable gas-transducer clamping fixtures in polycarbonate carrying cases

- PCFG-1 for pipes smaller than 12 in. (300 mm) in diameter
- PCFG-2 for pipes larger than 12 in. (300 mm) in diameter

Mounting Couplant

CPL-16

Area Classifications

- Standard: General purpose
- Optional: Weatherproof NEMA 4 IP65
- Optional: Explosion-proof Class I, Div. 1, Groups C,D
- Optional: Flameproof (Ex) II 2 G EEx md IIC T6-T3 (certification pending)

Note: PT878GC electronics are designed for general purpose areas.

Transducer Cables

- Standard: One pair of LEMO® coaxial transducer connectors with 25-ft (8-m) cables
- Optional: 500-ft (154-m) extension cables available for most transducers

Installation Requirements for Minimum Required Pressure with Resultant Maximum Flow

Pipe size in inches (mm)	Pipe wall in inches (mm)	Pressure in psig (bar)		Maximum flow velocity in ft/s (m/s)	
		Air	Natural gas	Air	Natural gas
4.00 (100)	≤0.24 (6.1)	60 (5.1)	150 (11.4)	120 (36.6)	120 (36.6)
	≤0.34 (8.6)	180 (13.4)	400 (28.6)	120 (36.6)	120 (36.6)
	≤0.68 (17.3)	300 (21.7)	800 (56.2)	120 (36.6)	120 (36.6)
6.00 (150)	≤0.28 (7.2)	60 (5.1)	150 (11.4)	90 (27.4)	120 (36.6)
	≤0.44 (11.2)	180 (13.4)	400 (28.6)	90 (27.4)	120 (36.6)
	≤0.87 (22.1)	300 (21.7)	800 (56.2)	90 (27.4)	120 (36.6)
8.00 (200)	≤0.33 (8.4)	60 (5.1)	175 (13.1)	80 (24.4)	100 (30.5)
	≤0.50 (12.7)	180 (13.4)	400 (28.6)	80 (24.4)	100 (30.5)
	≤0.88 (22.4)	300 (21.7)	800 (56.2)	80 (24.4)	100 (30.5)
10.00 (250)	≤0.37 (9.4)	60 (5.1)	200 (14.8)	70 (21.3)	85 (25.9)
	≤0.50 (12.7)	180 (13.4)	500 (35.5)	70 (21.3)	85 (25.9)
	≤1.00 (25.4)	300 (21.7)	800 (56.2)	70 (21.3)	85 (25.9)
12.00 (300)	≤0.38 (9.7)	60 (5.1)	250 (18.3)	55 (16.8)	70 (21.3)
	≤0.50 (12.7)	180 (13.4)	500 (35.5)	55 (16.8)	70 (21.3)
	≤1.00 (25.4)	300 (21.7)	800 (56.2)	55 (16.8)	70 (21.3)
14.00 (350)	≤0.38 (9.7)	90 (7.2)	300 (21.7)	50 (15.2)	60 (18.3)
	≤0.5 (12.7)	270 (19.6)	800 (56.2)	50 (15.2)	60 (18.3)
16.00 (400)	≤0.38 (9.7)	90 (7.2)	300 (21.7)	40 (12.2)	54 (16.5)
	≤0.5 (12.7)	270 (19.6)	800 (56.2)	40 (12.2)	54 (16.5)
18.00 (450)	≤0.38 (9.7)	90 (7.2)	300 (21.7)	35 (10.7)	50 (15.2)
	≤0.5 (12.7)	270 (19.6)	800 (56.2)	35 (10.7)	50 (15.2)
20.00 (500)	≤0.38 (9.7)	90 (7.2)	300 (21.7)	35 (10.7)	43 (13.1)
	≤0.5 (12.7)	270 (19.6)	800 (56.2)	35 (10.7)	43 (13.1)
24.00 (600)	≤0.38 (9.7)	90 (7.2)	300 (21.7)	30 (9.1)	36 (11.0)
	≤0.5 (12.7)	270 (19.6)	800 (56.2)	30 (9.1)	36 (11.0)

Find the diameter and wall thickness of your pipe. Read across the table to determine whether your application meets the minimum pressure and maximum flow velocity requirements. All data based on metal pipes. No minimum pressure requirement for plastic pipes.

Thickness-Gauge Option

Transducer

GE Panametrics dual-element transducer

Pipe-Thickness Range

0.05 to 3 in. (1.3 to 76.2 mm)

Pipe Materials

Most standard metal and plastic pipe materials

Accuracy

±1% typical or ±0.002 in. (±0.05 mm)

Thermal Exposure

Continuous operation to 37°C (100°F); intermittent operation to 260°C (500°F) for 10 sec followed by 2 min air cooling

Additional Options

Printer

- Infrared, portable, thermal printer with rechargeable battery and 120- to 240-VAC power supply/recharger
- Weight 13 oz (370 g), size 6.3 × 6.5 × 2.3 in. (160 × 164.2 × 59 mm), print width 4 in. (104 mm)

RS232-to-Infrared

Infrared adapter plugs into any available serial port to give desktop PCs infrared capability